



PS1000
Pressure Sensor



Description

The enhanced features and performance of the new PS1000 pressure sensor provides users with an affordable solution to a wide range of water level and pressure monitoring applications. The PS1000 has a standard, 2 wire, loop powered 4-20mA output with an option for 0-2.5Vdc. New features include the ability to re-range the sensor, as well as adjust the fluid density and gravity to suit specific applications.

The sensor is ideal for use in groundwater, surface water and a wide range of water monitoring and environmental projects. A durable corrosion resistant body, rugged ceramic capacitance transducer and double O ring sealing ensures suitability for harsh environment applications. The sensor comes fitted with a moulded polyurethane cable as standard. Other cable options are also supported. An optional SDI-12 adaptor can provide a serial output for external controllers or data loggers.

The sensor can be supplied in various gauge (vented) or absolute (non vented) pressure ranges. Gauge sensors utilise a closed vent system (CVS). This provides barometric pressure venting of the sensor, without the need to continually replace desiccant.

The PS1000 sensor is easy to install and provides users with a rugged and reliable solution to long term monitoring. For more information please contact your nearest sales office.

Features

- Loop powered – battery or solar
- 4-20mA or 0-2.5Vdc outputs
- 0.1% FS accuracy
- Field re-ranging and calibration
- User inputs for fluid density and local gravity
- Double O-ring design and moulded cable gland
- Acetal construction
- ½" diameter ceramic capacitance transducer
- Long term stability better than 0.2% per annum
- Optional SDI-12 adaptor for serial output
- Threaded fitting for Process connection.


Benefits

- Can be installed in active waters (acidic or salty) that would damage a stainless steel sensor.
- No need for regular desiccant replacement resulting in fewer field visits
- Low cost of ownership and minimal maintenance
- Ease of use and long term reliability.

Applications

- Sewer wet wells
- Bore hole monitoring
- River and dam level monitoring
- Flood warning systems
- Tank level monitoring
- Process level and pressure monitoring.

Dimensions

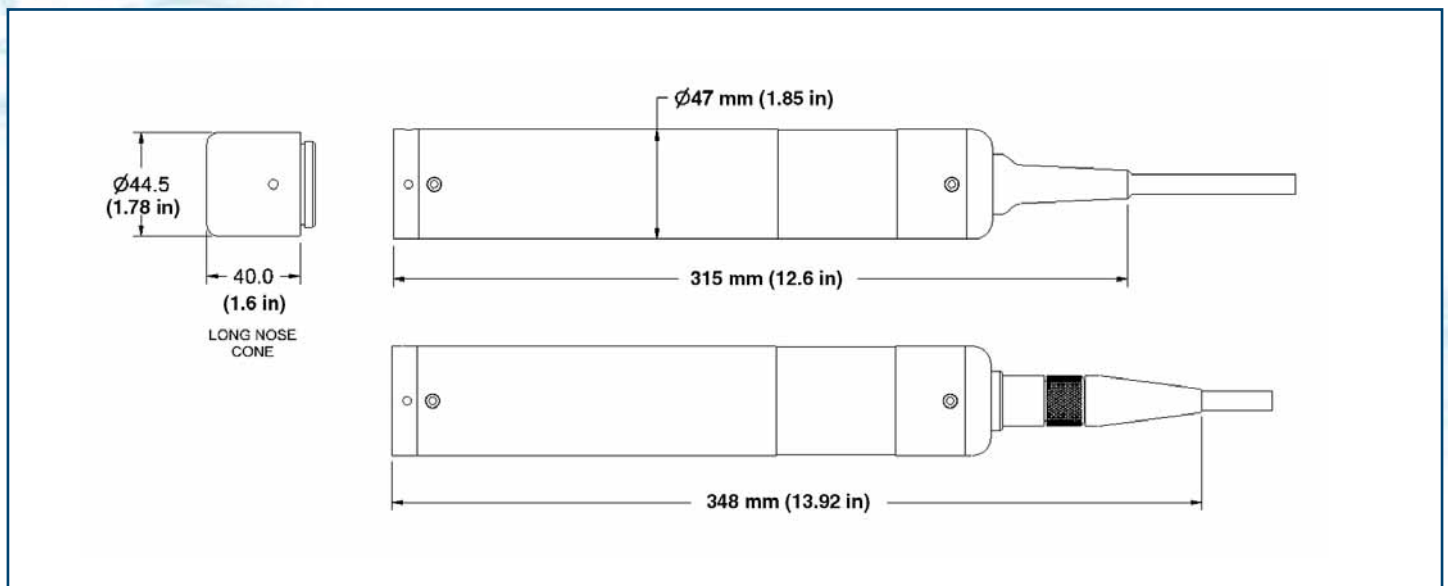

PS1000 Specification

Measurement technique		½" ceramic capacitance transducer
Std ranges available	Gauge	2.5, 5, 10, 20, 40, 75, 100m
	Absolute	20, 40, 75, 100m
Other ranges available		Yes (consult sales office)
Sensor output		4-20mA, or optional 0-2.5V dc (SDI12 via adaptor)
Overall accuracy (combined linearity, hysteresis and repeatability)		+/- 0.1% full scale
Long term stability		0.2% full scale per annum
Zero offset and full scale maximum variation		+/-0.02mA
Cable type		Polyurethane sheathed cable, OD 8mm, with 3mm vent tube, moulded entry, bare wire connection
Cable lengths		10,20,30,50,100,150m (32,65,100,165,325,490 ft)
Closed Vent System (CVS)		Gauge sensors must be fitted with a CVS
Power supply		8 to 30Vdc (at sensor) loop powered
Reverse polarity protection		Yes
Surge current protected		To 2kV
Warm up time to stable reading		<150 ms
Current consumption		Up to 20mA while turned on, 0mA when off.
Operating temperature		0-50°C
Storage temperature		-5°C - +60°C
Max over pressure		At least twice the full scale range
Dimensions (L x OD)		315mm x 47mm (12.6" x 1.78")
Weight		550g plus cable weight (665g per 10m length)
Wetted materials		Acetal, ceramic, 316 passivated stainless steel, polyurethane, viton

Optional Extras and Accessories

- For all Gauge (vented) Sensors, a Closed Vent System must also be fitted. (each CVS unit can handle up to 70m of vented cable)
- Sensors are normally supplied with a moulded cable pre cut to required length. Detachable cable options may be available*
- BSP Pressure Adaptor (Part No 492-0238) for process connection for pressure monitoring. (Gas Bubbler, Pipelines, Tanks)*
- Protective Copper Nose Cone (Part No 492-0241) - prevents marine and biological growth on sensor face*
- Serial Breakout Box (Part No 7BB-1000) – provides user field adjustments and calibration*
- SDI12 Adaptor Unit –(Part No 7SDI-1000) provides 3 wire SDI12 serial output for Data Logger *

How to Order

The following information will be required:

- Sensor full scale range (specify range in m)
- Sensor type (Gauge or Absolute)
- Output required (4-20mA or 0-2.5V)
- Moulded cable length (specify length in m)
- Closed Vent System (for Gauge sensors)
- Accessories (Nose cone, Breakout box, SDI12 box)*

* Consult your Greenspan sales representative for further details.





Australia

Head Office
Goyen Controls Co Pty Ltd
268 Milperra Road
Milperra, NSW 2214

Telephone: 1800 805 372
Facsimile: 1300 658 799

Sales and Service
Queensland, South Australia
Victoria, Western Australia

Telephone: 1800 805 372
Facsimile: 1300 658 799

USA

Goyen Valve Corporation
1195 Airport Road
Lakewood
New Jersey 08701, USA

Telephone: 1 732 364 7800
Facsimile: 1 732 364 1356

Asia

Goyen Controls Co Pty Ltd
Shanghai Representative Office
1209 Greenland Business Centre
1258 Yu Yuan Road
Shanghai PC200050, CHINA

Telephone: 86 21 5239 8810
Facsimile: 86 21 5239 8812

Goyen Controls Co Pty Ltd
73-M Jalan Mega Mendung
Kompleks Bandar OUG
58200 Kuala Lumpur, MALAYSIA

Telephone: 60 37 987 6839
Facsimile: 60 37 987 7839

Greenspan Singapore Pte Ltd
02-01, Minwa Industrial Building
39 Genting Lane
Singapore 349554

Telephone: 65 6748 0140
Facsimile: 65 6748 2534

Europe

Goyen Controls Co UK Ltd
Unit 3B Beechwood
Chineham Business Park
Basingstoke, Hampshire, RG24 8WA
UNITED KINGDOM

Telephone: 44 1256 817 800
Facsimile: 44 1256 843 164

Tyco Umwelttechnik GmbH
Im Petersfeld 6
D-65624 Altdiez
GERMANY

Telephone: 49 6432 1001/1002
Facsimile: 49 6432 63810

Mecair S.r.l.
Via per Cinisello 97
20054 Nova Milanese
Milano,
ITALY

Telephone: 39 362 375 118
Facsimile: 39 362 375 124