
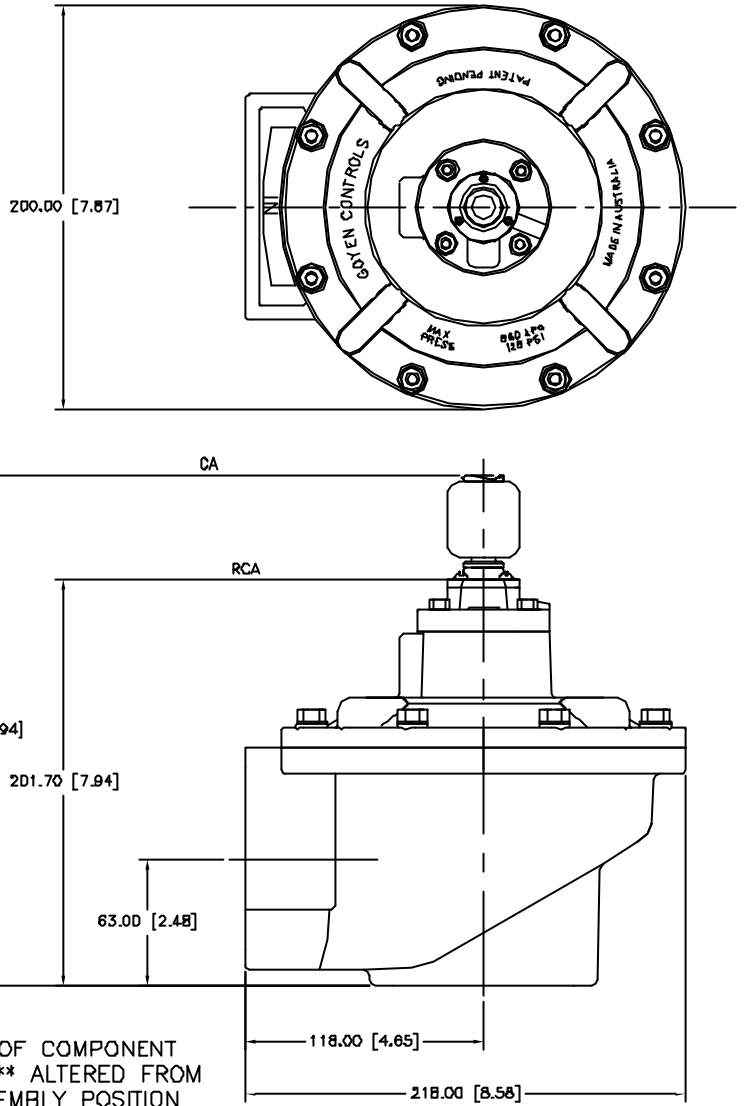


CA & RAC 76 T

**GOYEN**

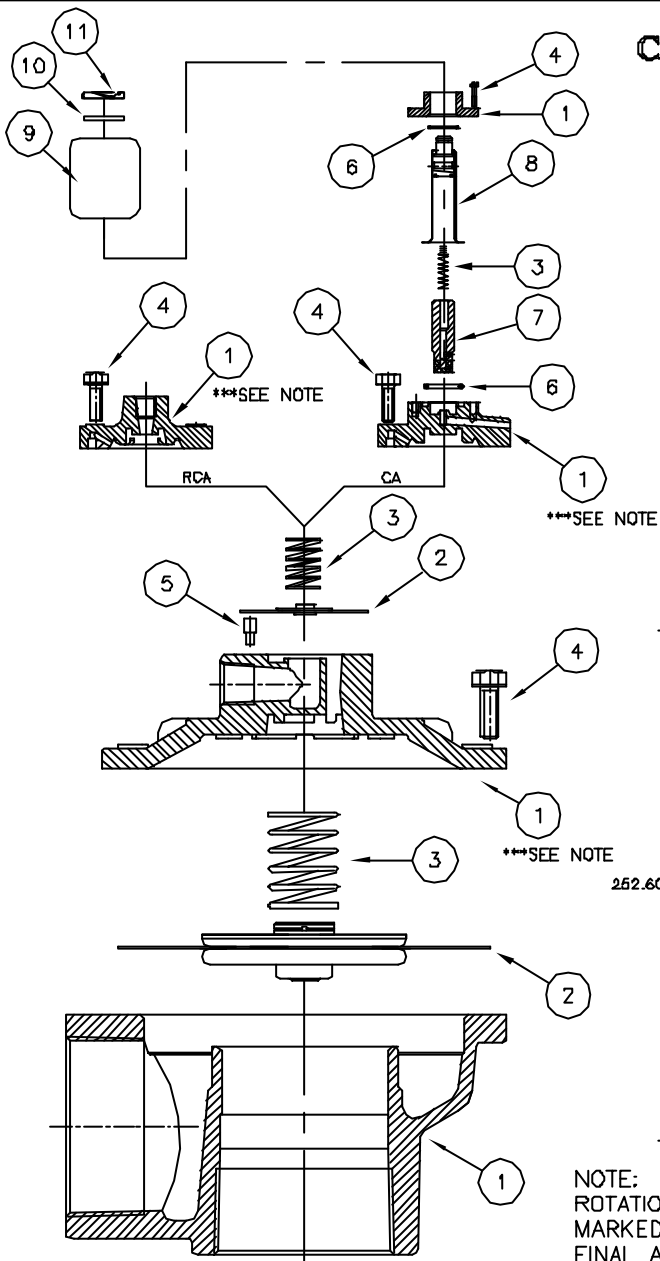

NOTE:  
ROTATION OF COMPONENT  
MARKED \*\*\* ALTERED FROM  
FINAL ASSEMBLY POSITION  
FOR CLARITY OF CROSS  
SECTION

**MECHANICAL DETAILS**

No	DESCRIPTION	STANDARD MATERIAL	PORT OPTIONS	HI TEMP MATERIALS	KIT No STANDARD	KIT No HI TEMP
1	BODY & COVER	ALUMINIUM DIE CAST CA313	3"RC,NPT,G	AS STANDARD	-	-
2	MAIN DIAPHRAGM	BUNA N / BUNA N RUBBER	N/A	VITON	K7600	K7601
3	MAIN SPRING	304 STAINLESS STEEL	N/A	AS STANDARD	-	-
4	SCREWS	304 STAINLESS STEEL	N/A	AS STANDARD	-	-
5	BLEED PIN	FREE M/C ALUMINIUM	N/A	AS STANDARD	-	-
6	O' RINGS	NITRILE	N/A	VITON	-	-
7	PLUNGER ASS'Y	340 FR STAINLESS STEEL	N/A	AS STANDARD	K0380	-
8	FERRULE/IRON TOP ASS'Y	305 STAINLESS STEEL	N/A	AS STANDARD	K0380	-
9	COIL ARRGMNT.	130° RATED NYLON ENCAPSULATION	QD -1/2 NPSC -M20x1.5	N/A	QR-K030-K0309 QD(M)-K0310-K0319 QD(N)-K0320-K0329	N/A
10	WASHER	PRESSED ALUMINIUM	N/A	AS STANDARD	-	-
11	CLIP	MECHANICAL PLATED STEEL	N/A	AS STANDARD	-	-

**ELECTRICAL DETAILS**

COIL VOLTAGE	200/240 VAC, 100/120 VAC, 24 VAC, 24 VDC, 12 VDC
COIL CONNECTION	QR - DIN CONNECTION QD CONDUIT ENTRY

**WEIGHTS**

UNIT WEIGHT	RCA = 4.556 Kg   CA = 4.770 Kg
-------------	--------------------------------

DOC No	CAS_DG_76T
REVISION No	2
ISSUE DATE	18.7.2002